



TALEXmodule LLE-FLEX-8-4800

TALEXmodule LLE FLEX ADVANCED

Product description

- Dimmable 24 V constant voltage stripe (SELV)
- Ideal for various decorative lighting applications: facade accent lighting, ceiling integration, cove lighting and for aluminium extrusions

Features and benefits

- Luminous flux range of 600, 1,200 and 1,800 lm/m
- Colour temperature 3,000, 4,000 and 6,500 K with SDCM 5[®]
- Efficacy of the module up to 130 lm/W at $t_p = 65^\circ\text{C}$
- High design freedom due to 10 cm cut-options
- Pitch distance of 1.4 cm enables high light homogeneity
- Self-adhesive tape at the backside for simple mounting on different surfaces
- PCB to PCB and wire to PCB connectors for toolless handling and connection
- Long life-time up to 50,000 hours
- 5-year guarantee
- System solution in combination with Tridonic constant voltage LED Driver (fixed output and dimmable)



Standards, page 5

Colour temperatures and tolerances, page 7




TALEXmodule LLE-FLEX-8-4800

TALEXmodule LLE FLEX ADVANCED

Technical data

Beam characteristic	120°
Ambient temperature range	-35 ... +50 °C
tp rated	65 °C
tc	75 °C
DC supply voltage	24 V
DC supply voltage range [®]	21.5 – 26.4 V
Insulation test voltage	0.5 kV
ESD classification	severity level 1
Risk group (EN 62471:2008)	0
Type of protection	IP00

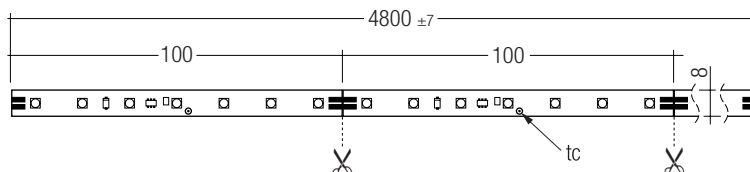

Ordering data

Type	Article number	Colour temperature	Packaging carton	Weight per roll
STARK LLE-FLEX-8-4800-600-830	28000629	3,000 K	15 pc(s).	0.085 kg
STARK LLE-FLEX-8-4800-600-840	28000630	4,000 K	15 pc(s).	0.100 kg
STARK LLE-FLEX-8-4800-600-765	28000631	6,500 K	15 pc(s).	0.085 kg
STARK LLE-FLEX-8-4800-1200-830	28000632	3,000 K	15 pc(s).	0.096 kg
STARK LLE-FLEX-8-4800-1200-840	28000633	4,000 K	15 pc(s).	0.100 kg
STARK LLE-FLEX-8-4800-1200-765	28000634	6,500 K	15 pc(s).	0.085 kg
STARK LLE-FLEX-8-4800-1800-830	28000635	3,000 K	15 pc(s).	0.085 kg
STARK LLE-FLEX-8-4800-1800-840	28000636	4,000 K	15 pc(s).	0.101 kg
STARK LLE-FLEX-8-4800-1800-765	28000637	6,500 K	15 pc(s).	0.085 kg

Specific technical data

Type [®]	Photometric code	Typ. luminous flux at tp = 25 °C [®]	Typ. luminous flux at tp = 65 °C [®]	Typ. current consumption at tp = 65 °C [®]	Typ. power consumption at tp = 65 °C [®]	Efficacy of the module at tp = 25 °C	Efficacy of the module at tp = 65 °C	Colour rendering index CRI
STARK LLE-FLEX-8-4800-600-830	830/56x	600 lm/m	510 lm/m	179 mA/m	4.3 W/m	125 lm/W	116 lm/W	> 80
STARK LLE-FLEX-8-4800-600-840	840/56x	600 lm/m	510 lm/m	179 mA/m	4.3 W/m	125 lm/W	116 lm/W	> 80
STARK LLE-FLEX-8-4800-600-765	765/56x	600 lm/m	510 lm/m	163 mA/m	3.9 W/m	140 lm/W	130 lm/W	> 70
STARK LLE-FLEX-8-4800-1200-830	830/56x	1,200 lm/m	1,020 lm/m	370 mA/m	8.9 W/m	123 lm/W	114 lm/W	> 80
STARK LLE-FLEX-8-4800-1200-840	840/56x	1,200 lm/m	1,020 lm/m	370 mA/m	8.9 W/m	123 lm/W	114 lm/W	> 80
STARK LLE-FLEX-8-4800-1200-765	765/56x	1,200 lm/m	1,020 lm/m	339 mA/m	8.1 W/m	133 lm/W	124 lm/W	> 70
STARK LLE-FLEX-8-4800-1800-830	830/56x	1,800 lm/m	1,530 lm/m	573 mA/m	13.8 W/m	119 lm/W	111 lm/W	> 80
STARK LLE-FLEX-8-4800-1800-840	840/56x	1,800 lm/m	1,530 lm/m	573 mA/m	13.8 W/m	119 lm/W	111 lm/W	> 80
STARK LLE-FLEX-8-4800-1800-765	765/56x	1,800 lm/m	1,530 lm/m	522 mA/m	12.5 W/m	130 lm/W	121 lm/W	> 70

[®] Tolerance range for optical and electrical data: ±10 %. Values given for 1 m LLE-FLEX.

[®] Exceeding the max. operating voltage leads to an overload on the LLE-FLEX. This may in turn result in a reduction in life-time or even in destruction.


[®] Integral measurement over the complete module.

ACCES-
SORIES

Connector for LLE-FLEX

Product description



- For connection of LLE-FLEX modules
- Easy assembly: remove adhesive tape on the backside of the LLE-FLEX in the connection area, insert the LLE-FLEX into the connector and lock it by pressing down the top of the connector
- Glow wire test according to IEC 60695-2-11: 650 °C
- Irated = 5 A
- Urated = 29.9 V
- Wire cross section AWG 22

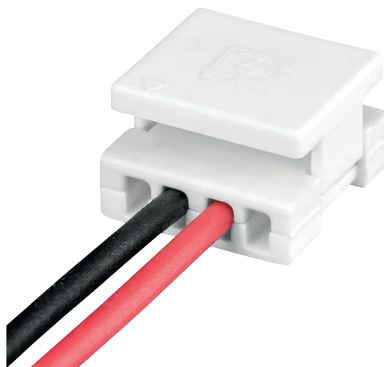


Stecker



Steckverbinder



Stecker

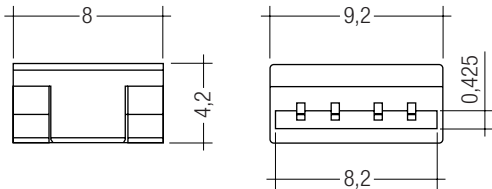

Steckverbinder

Ordering data

Type	Article number	Packaging bag	Weight per pc.
Stecker PTF 0,3/2-WB-1,8-H	28000994	10 pc(s).	0.003 kg
Steckverbinder PTF 0,3/4-BB-1,8-H	28000995	250 pc(s).	0.007 kg

LED Driver matrix – LLE-FLEX-8-4800

REMOTE – Dimming			REMOTE – Fixed-output								
Type	LED 0025 K210 24V	LED 0025 K211 24V	LED 0025 K201 24VDC 25VA	LCU 035/24 E020 120-240V	LCU 060/24 E020 120-240V	LCU 100/24 E020 120-240V	LCU 150/24 E020 120-240V	LCU 35W 24V SR TOP	LCU 60W 24V SR TOP	LCU 96W 24V SR TOP	LCU 180W 24V SR TOP
Article number	28000858	28000582	28000849	24166320	24166324	24166328	24166333	28000411	28000412	28000413	28000414

Type	Assignable LED Driver		Assignable LED Driver								
LLE-FLEX-8-4800-600-8x0	10–530 cm	3x10–170 cm	10–530 cm	70–590 cm	120–1.010 cm	240–1.690 cm	470–2.540 cm	90–620 cm	140–1.060 cm	240–1.700 cm	420–3.200 cm
LLE-FLEX-8-4800-600-765	10–580 cm	3x10–180 cm	10–580 cm	80–650 cm	130–1.110 cm	260–1.850 cm	520–2.780 cm	90–680 cm	160–1.160 cm	260–1.860 cm	460–3.500 cm
LLE-FLEX-8-4800-1200-8x0	10–250 cm	3x10–80 cm	10–250 cm	40–280 cm	60–490 cm	120–810 cm	230–1.220 cm	40–300 cm	70–510 cm	120–820 cm	210–1.540 cm
LLE-FLEX-8-4800-1200-765	10–280 cm	3x10–90 cm	10–280 cm	40–310 cm	70–530 cm	130–890 cm	250–1.340 cm	50–320 cm	80–560 cm	130–900 cm	230–1.680 cm
LLE-FLEX-8-4800-1800-8x0	10–160 cm	3x10–50 cm	10–160 cm	30–170 cm	40–300 cm	80–500 cm	150–760 cm	30–180 cm	50–310 cm	80–510 cm	140–950 cm
LLE-FLEX-8-4800-1800-765	10–180 cm	3x10–50 cm	10–180 cm	30–200 cm	40–340 cm	80–580 cm	160–870 cm	30–210 cm	50–360 cm	80–580 cm	150–1.090 cm

It must not be more than one role (480 cm) chained together!

For detailed information see LED Driver data sheet.

1. Standards

IEC 62031
IEC 62471
IEC 62717
IEC 61000-4-2

1.1 Photometric code

Key for photometric code, e. g. 830 / 349

1 st digit		2 nd + 3 rd digit	4 th digit	5 th digit	6 th digit
Code	CRI	Colour temperature in Kelvin x 100	McAdam initial	McAdam after 25% of the life-time (max.6000h)	Luminous flux after 25% of the life-time (max.6000h)
					Code
					Luminous flux
7	70 – 79				7 ≥ 70 %
8	80 – 89				8 ≥ 80 %
9	≥90				9 ≥ 90 %

1.2 Energy classification

Type	Energy classification
LLE-FLEX-8-4800-600-830	A++
LLE-FLEX-8-4800-600-840	A++
LLE-FLEX-8-4800-600-765	A++
LLE-FLEX-8-4800-1200-830	A+
LLE-FLEX-8-4800-1200-840	A+
LLE-FLEX-8-4800-1200-765	A+
LLE-FLEX-8-4800-1800-830	A+
LLE-FLEX-8-4800-1800-840	A+
LLE-FLEX-8-4800-1800-765	A+

2. Thermal details

2.1 tc point, ambient temperature and life-time

The temperature at tp reference point is crucial for the light output and life-time of a TALEX product.

For TALEXmodule STARK LLE a tp temperature of 65 °C has to be complied in order to achieve an optimum between heat sink requirements, light output and life-time.

Compliance with the maximum permissible reference temperature at the tc point must be checked under operating conditions in a thermally stable state. The maximum value must be determined under worst-case conditions for the relevant application.

The tc and tp temperature of LED modules from Tridonic are measured at the same reference point.

2.2 Storage and humidity

Storage temperature	-30 ... +80 °C
---------------------	----------------

Operation only in non condensing environment.
Humidity during processing of the module should be between 0 to 70 %.

2.3 Thermal design and heat sink

The rated life of TALEX products depends to a large extent on the temperature. If the permissible temperature limits are exceeded, the life of the TALEXmodule STARK LLE will be greatly reduced or the TALEXmodule STARK LLE may be destroyed.

2.4 Heat sink values

TALEXmodule STARK LLE-FLEX-8-600			
ta	tp	Rth, hs-a	Cooling area
25 °C	65 °C	–	self cooling
35 °C	65 °C	–	self cooling
45 °C	65 °C	–	self cooling
50 °C	65 °C	–	self cooling

TALEXmodule STARK LLE-FLEX-8-1200			
ta	tp	Rth, hs-a	Cooling area
25 °C	65 °C	–	self cooling
35 °C	65 °C	–	self cooling
45 °C	65 °C	17.7 K/W	37.7 cm²
50 °C	65 °C	12.6 K/W	52.9 cm²

TALEXmodule STARK LLE-FLEX-8-1800			
ta	tp	Rth, hs-a	Cooling area
25 °C	65 °C	–	self cooling
35 °C	65 °C	–	self cooling
45 °C	65 °C	10.6 K/W	62.9 cm²
50 °C	65 °C	7.2 K/W	92.6 cm²

Notes

The actual cooling surface can differ because of the material, the structural shape, outside influences and the installation situation.

3. Installation / wiring

3.1 Electrical supply/choice of LED Driver

TALEXmodule STARK LLE from Tridonic are not protected against overvoltages, overcurrents, overloads or short-circuit currents. Safe and reliable operation can only be guaranteed in conjunction with a LED Driver which complies with the relevant standards. The use of TALEXconverter from Tridonic in combination with TALEXmodule STARK LLE guarantees the necessary protection for safe and reliable operation.

If a LED Driver other than Tridonic TALEXconverter is used, it must provide the following protection:

- SELV
- Short-circuit protection
- Overload protection
- Overtemperature protection



TALEXmodule STARK LLE must be supplied by a constant voltage LED Driver.
Operation with a constant current LED Driver will lead to an irreversible damage of the module.

Wrong polarity can damage the TALEXmodule STARK LLE-FLEX.

3.2 Mounting instruction



None of the components of the TALEX(module STARK LLE (substrate, LED, electronic components etc.) may be exposed to tensile or compressive stresses.

The LLE-FLEX is separable each 100 mm with the full function of each segment.

The fixing/cooling surface must be cleaned before installing the LLE-FLEX modules to remove all dirt, dust and grease.

Prevent shear- or peel forces

Min. bending radius of the LLE-FLEX is 3 cm.



Chemical substance may harm the LED module. Chemical reactions could lead to colour shift, reduced luminous flux or a total failure of the module caused by corrosion of electrical connections.

Materials which are used in LED applications (e.g. sealings, adhesives) must not produce dissolver gas. They must not be condensation curing based, acetate curing based or contain sulfur, chlorine or phthalate. Avoid corrosive atmosphere during usage and storage.

3.3 EOS/ESD safety guidelines



The device / module contains components that are sensitive to electro-static discharge and may only be installed in the factory and on site if appropriate EOS/ESD protection measures have been taken. No special measures need be taken for devices/modules with enclosed casings (contact with the pc board not possible), just normal installation practice. Please note the requirements set out in the document EOS / ESD guidelines (Guideline_EOS_ESD.pdf) at: <http://www.tridonic.com/esd-protection>

4. Life-time

4.1 Life-time, lumen maintenance and failure rate

The light output of an LED Module decreases over the life-time, this is characterized with the L value.
L70 means that the LED module will give 70 % of its initial luminous flux. This value is always related to the number of operation hours and therefore defines the life-time of an LED module.

As the L value is a statistical value and the lumen maintenance may vary over the delivered LED modules.
The B value defines the amount of modules which are below the specific L value, e.g. L70B10 means 10 % of the LED modules are below 70 % of the initial luminous flux, respectively 90 % will be above 70 % of the initial value. In addition the percentage of failed modules (fatal failure) is characterized by the C value.

The F value is the combination of the B and C value. That means for F degradation and complete failures are considered, e.g. L70F10 means 10 % of the LED modules may fail or be below 70 % of the initial luminous flux.

4.2 Lumen maintenance for TALEX(module STARK LLE-FLEX-8

Supply voltage	tp temperature	L90 / F10	L90 / F50	L80 / F10	L80 / F50	L70 / F10	L70 / F50
24 V	55 °C	40,000 h	>50,000 h	>50,000 h	>50,000 h	>50,000 h	>50,000 h
24 V	65 °C	20,000 h	44,000 h	40,000 h	>50,000 h	>50,000 h	>50,000 h
24 V	75 °C	10,000 h	25,000 h	20,000 h	25,000 h	32,000 h	>50,000 h


6. Photometric characteristics

6.1 Coordinates and tolerances according to CIE 1931


The specified colour coordinates are measured integral by a current impulse with typical values of module and a duration of 100 ms.
The ambient temperature of the measurement is $t_a = 25\text{ }^{\circ}\text{C}$.
The measurement tolerance of the colour coordinates are ± 0.01 .

3,000 K

	x0	y0
Centre	0.4345	0.4033

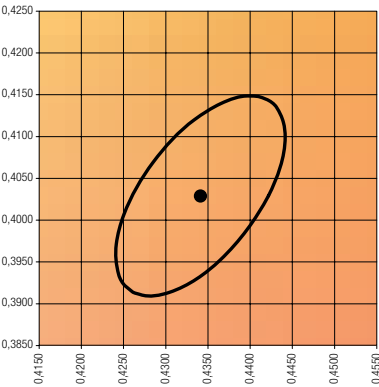


MacAdam Ellipse: 5SDCM

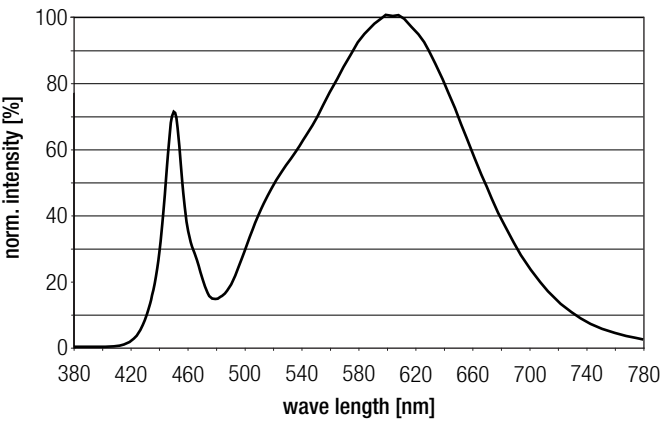


4,000 K

	x0	y0
Centre	0.3825	0.3796

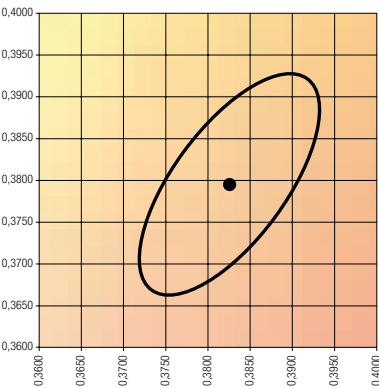


MacAdam Ellipse: 5SDCM

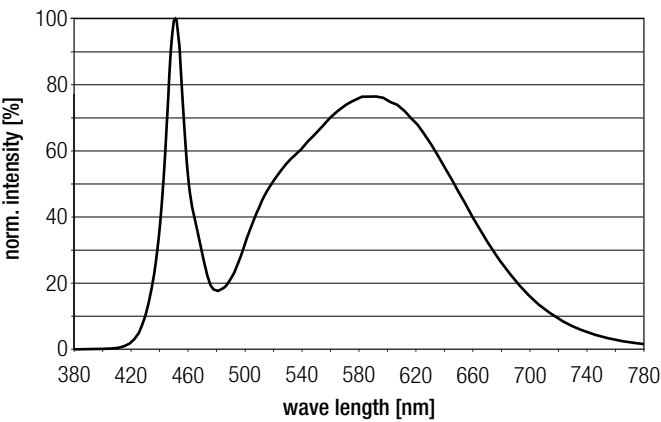


6,500 K

	x0	y0
Centre	0.3135	0.3284

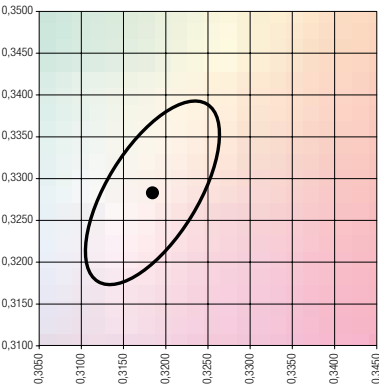


MacAdam Ellipse: 5SDCM

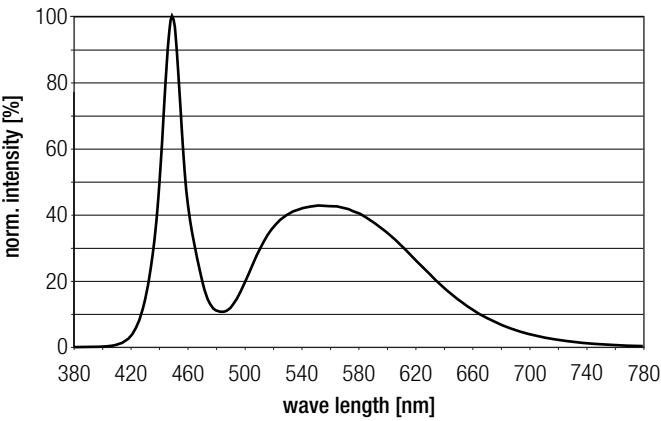

6.2 Light distribution

The optical design of the TALEXmodule STARK LLE product line ensures optimum homogeneity for the light distribution.

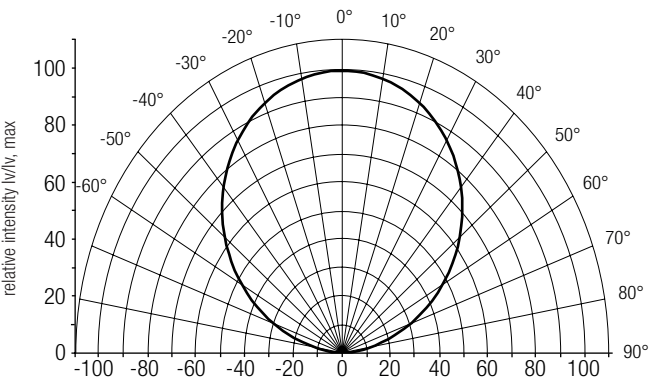

The colour temperature is measured over the complete module. The single LED light points can be outside of 5SDCM. To ensure an ideal mixture of colours and a homogenous light distribution a suitable optic (e. g. PMMA diffuser) and a sufficient spacing between module and optic (typ. 5 cm) should be used.

3D-Data, photometric data and Design-in guide available on request or go to www.tridonic.com

6.3 Relative luminous flux vs. tc temperature

