


Features

- ▶ Decorative LED wall light
- ▶ Incorporating Tridonic CLE
- ▶ Extruded acrylic diffuser
- ▶ Integral LED driver
- ▶ Up to 1950 lumens at 15.4W
- ▶ Emergency options available
- ▶ Life 50,000 hours (L70)

Technical Drawing

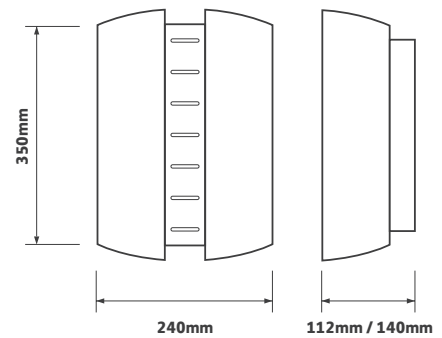

Ordering Information

Model Ref.	Module Options	
	Lumen Output (lm)	Colour Temp (K)
88.001	1790	3000
88.002	1950	4000
88.003	1300	3000
88.004	1420	4000


Options

Please select from the options below.

/LEM	Integrated LED emergency
/LEMS	Integrated LED 3 hour self-test emergency
/EM	3 hour emergency conversion

Personalised and bespoke decorative fascias available upon request




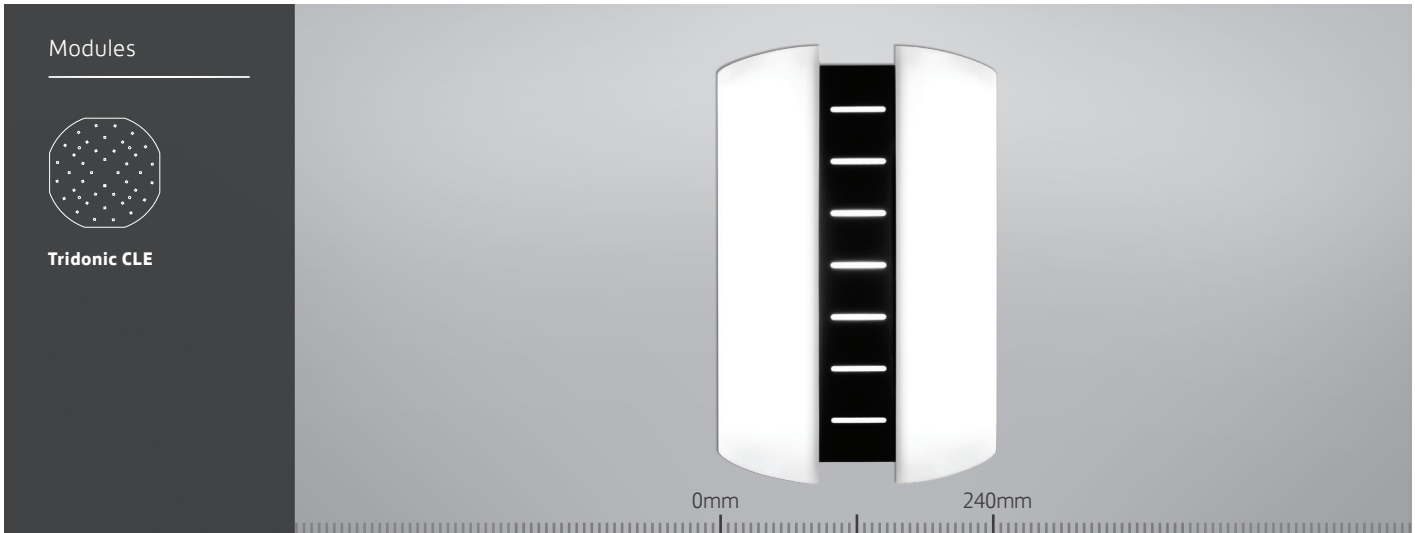

Features

- ▶ Decorative LED wall light
- ▶ Incorporating Tridonic CLE
- ▶ Extruded acrylic diffuser
- ▶ Integral LED driver
- ▶ Up to 1950 lumens at 15.4W
- ▶ Emergency options available
- ▶ Life 50,000 hours (L70)

Technical Drawing

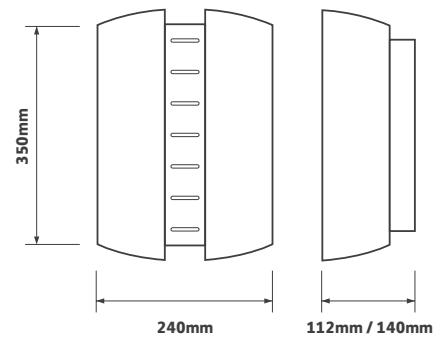

Ordering Information

Model Ref.	Module Options	
	Lumen Output (lm)	Colour Temp (K)
88.001	1790	3000
88.002	1950	4000
88.003	1300	3000
88.004	1420	4000

Options

Please select from the options below.

/LEM	Integrated LED emergency
/LEMS	Integrated LED 3 hour self-test emergency
/EM	3 hour emergency conversion

Personalised and bespoke decorative fascias available upon request



88. Technical

Technical Information

Nominal weight	1.4kg	Operating ambient temperature	-25°C to +35°C
Mains voltage	220 -240V	Target life ambient temperature	+35°C
Mains frequency	50 - 60Hz	Mains lead	500mm 2 core LSF
Ingress protection	IP20	Life	50,000 hours (L70)

Model Ref.	Module Output (lm)	Module Efficacy (lm/tcW)	Current (mA)	Colour Temp (K)	Colour Rendering (Ra)	Luminaire Power (tcW)	Luminaire Output (llm)	Luminaire Efficacy (llm/tcw)
88.001	1790	117	500	3000	80	15.3	304	19.9
88.002	1950	127	500	4000	80	15.4	332	21.6
88.003	1300	127	350	3000	80	10.2	221	21.6
88.004	1420	139	350	4000	80	10.2	241	23.6

Control Gear

Fixed Output

- ▶ >85% efficiency
- ▶ Over temperature protection
- ▶ CE and ENEC approved

88. Technical

Technical Information

Nominal weight	1.4kg	Operating ambient temperature	-25°C to +35°C
Mains voltage	220 -240V	Target life ambient temperature	+35°C
Mains frequency	50 - 60Hz	Mains lead	500mm 2 core LSF
Ingress protection	IP20	Life	50,000 hours (L70)

Model Ref.	Module Output (lm)	Module Efficacy (lm/tcW)	Current (mA)	Colour Temp (K)	Colour Rendering (Ra)	Luminaire Power (tcW)	Luminaire Output (llm)	Luminaire Efficacy (llm/tcw)
88.001	1790	117	500	3000	80	15.3	304	19.9
88.002	1950	127	500	4000	80	15.4	332	21.6
88.003	1300	127	350	3000	80	10.2	221	21.6
88.004	1420	139	350	4000	80	10.2	241	23.6

Control Gear

Fixed Output

- ▶ >85% efficiency
- ▶ Over temperature protection
- ▶ CE and ENEC approved