EasyLED Series Reveal Round Bollard **IP67**





Housing:

Extruded aluminum housing with flush mounting base & vandal-resistant screws, flat top, powdercoat finish over a chromate conversion coating, sealed driver compartment.

Lens:

Clear or LumaLens opal inner lens to seal LED array.

*Mounting:*Mounting kit with 200mm anchor bolts (Included)

LumaFit LED:

Delivered Lumens:

1,539 (Clear Array Lens, 4K); 1,603 (Clear Array Lens, 5K);

CRI: 80+

CCT: 4000K, 5000K Rated Life: 50,000 Hours 5-Year Warranty Aluminum Boards

Wattage: Array: 16.6w, System: 19.7w

Electronic Driver, 120-277V, 50/60Hz

Dimmable Driver Listings & Ratings:

Operating Temperatures: -20°C to +40°C


Options:

Surge Protection


Custom colors available upon request.


Bollards can be cut to custom lengths upon request.

Reveal Round Bollard				
Catalog #		Description		
Complete U Ordering Info Example: B38		CBSP		
B3E	Model:	B3E		
Q	LED Mfr:	Q=QSSI		
F	Optics:	F=Type V		
1X	Number of Arrays:	1X=One		
16	Wattage:	16=16W		
U	Ballast:	U=120-277V		
5K	CCT:	4K=4000K, 5K=5000K		
С	Lens:	C=Clear Array Lens, L=LumaLens Opal Array Lens		
В	Color:	Z=Bronze, W=White, B=Black, G=Gray		
SP	Options:	SF=Single Fuse, DF=Double Fuse, SP=Surge Protection		



Catalog #	Description	
BOLAN4	Mounting Kit, Includes Bracket and Three 100mm Anchor Bolts	
BOLAN8	Mounting Kit, Includes Bracket and Three 200mm Anchor Bolts	
BOLAN12	Mounting Kit, Includes Bracket and Three 300mm Anchor Bolts	
BOLAN15	Mounting Kit, Includes Bracket and Three 380mm Anchor Bolts	



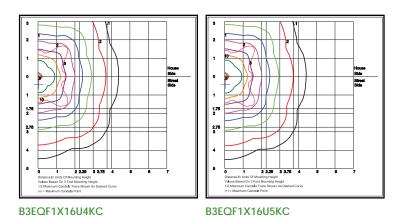

Complete Lighting Services Ltd
Tel: 01256 811600 Fax: 01256 811601
email: sales@completelighting.co.uk
web: www.completelighting.co.uk