


125 Series Datasheet

TRIDONIC
TECHNOLOGY
INSIDE



COMPLETE LIGHTING
SERVICES LIMITED
CLS

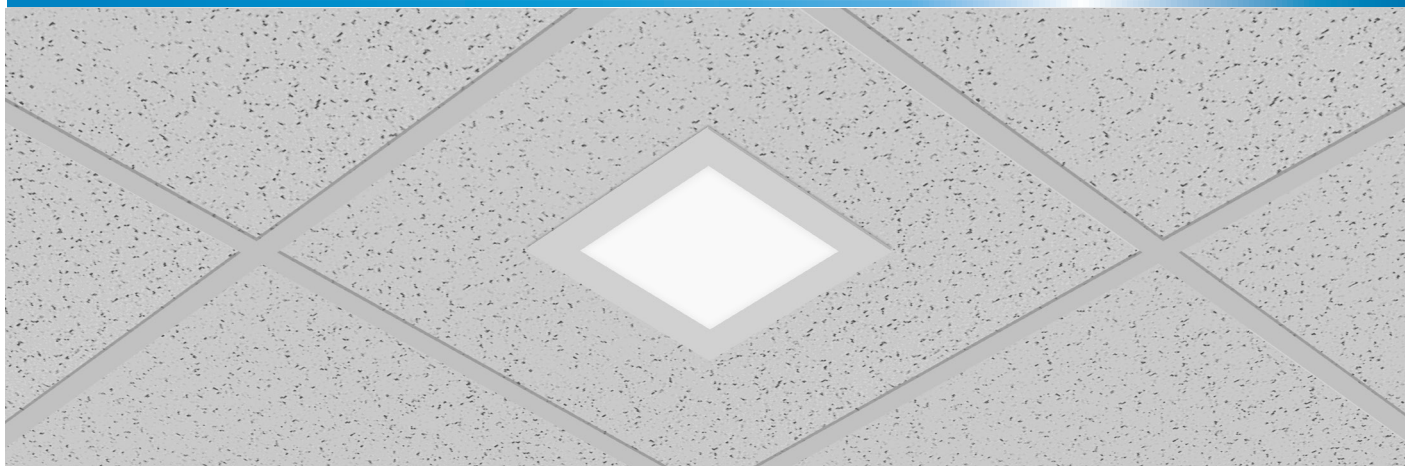

Key Features

- ▶ LED illuminated light box
- ▶ Ultra-thin bezel designed to minimise visual impact
- ▶ IP54 high transmission acrylic diffuser
- ▶ Uniform light distribution
- ▶ Back lit design incorporating Tridonic CLE module
- ▶ Excellent system efficacy to aid compliance with Building Regulations Part L2
- ▶ Life greater than 50,000 hours L80 / F10
- ▶ Short circuit, overload and temperature protection

Technical Drawing

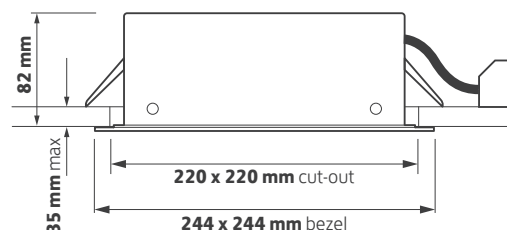

Ordering Information

Luminaire Output lm	Power W	Colour	Model Ref.
475	6	830	125.001
475	6	840	125.002
1025	10	830	125.003
1025	10	840	125.004
1375	16	830	125.005
1375	16	840	125.006

Options


Please select from the options below.

SwitchDIM, DALI or DSI	/ECO
Single Point Connection to an ILEM product	/SPC
3 hour EM conversion	/EM
DALI and self-test EM conversion	/EMD


125 Series Options and Accessories




Options

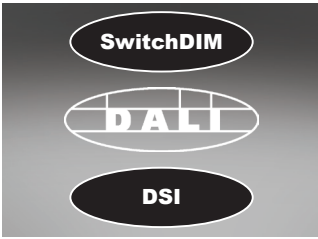


/ECO
SwitchDIM, DALI or DSI



/SPC
Single Point Connection to an ILEM product



/EM
3 hour EM conversion



/EMD
DALI and Self-test EM conversion