

129 Series Datasheet

TRIDONIC
TECHNOLOGY
INSIDE


COMPLETE LIGHTING
SERVICES LIMITED
CLS



Key Features

- ▶ LED IP65 anti-corrosive batten with IK10 impact resistance rating
- ▶ Robust injection moulded polycarbonate body
- ▶ Clear vapour proof high impact diffuser
- ▶ High system efficacy to aid compliance with Building Regulations Part L
- ▶ Tridonic LED and driver system
- ▶ Opal light pipe for homogeneous output
- ▶ Quick release flush mounted fixing clips
- ▶ Adjustable 1.5 m suspension kit and corner mount kit available
- ▶ Dimming, sensor and emergency options

Technical Drawing

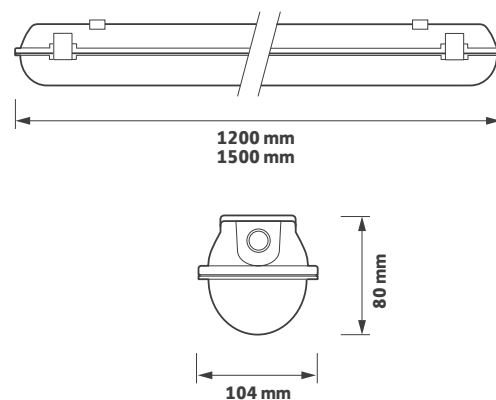

DC

Declaration of Conformity available

Ordering Information

Output (Lm)	Power (tcW)	Colour	Size (mm)	Model Ref.
2225	16	830	1200	129.005
2325	16	840	1200	129.006
4225	30	830	1200	129.001
4400	30	840	1200	129.002
2775	19	830	1500	129.007
2900	19	840	1500	129.008
5250	36	830	1500	129.003
5500	36	840	1500	129.004

Options

Please select from the options below.


SwitchDIM, DALI or DSI	/ECO
EM conversion *	/EM
Sensor on / off	/SO
4 ft stainless steel clips	SC129/10
5 ft stainless steel clips	SC129/14
Corner mount kit	CMK129
1.5 m suspension kit	SUS129
Sensor programming remote	SPR129

* Not available with **/SO**

129 Series Options and Accessories




Options



/ECO
SwitchDIM, DALI or DSI



/EM
EM conversion
(Not available with /SO)

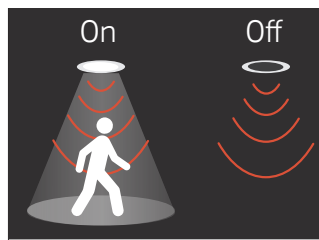

/SO
Sensor on / off
Not available with /ECO

Accessories



SC129/10
10 pack stainless steel clips (1200 mm)




SC129/14
14 pack stainless steel clips (1500 mm)



SUS129
1.5 m suspension kit




CMK129
Corner mount kit



SPR129
Sensor programming remote
(Required to change standard sensor settings)

/SO - Sensor Detection Range

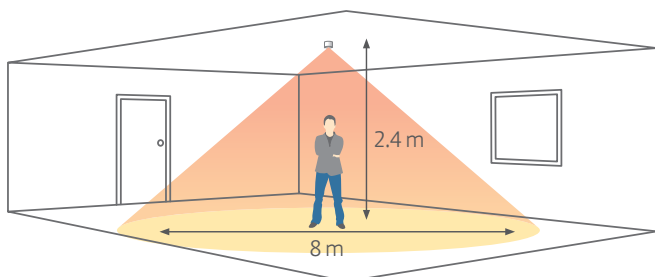

Also Available



Product variations
Other specifications available on request