



# 134 Series Datasheet



## Key Features

- ▶ Low glare LED kit to retrofit MR16 and GU10 luminaires
- ▶ Fitted with an integral IP44 protective lens as standard
- ▶ Precision moulded polycarbonate reflector with medium beam distribution
- ▶ Tridonic full spectrum COB LED and driver system
- ▶ Thermally optimised heatsink for long life
- ▶ Short circuit, overload and temperature protection

## Technical Drawing

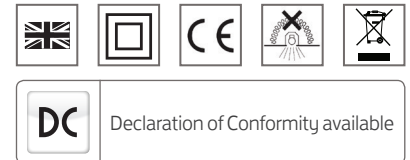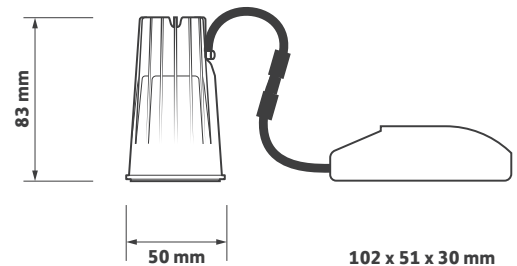

## Ordering Information

| Output (Lm) | Power (tcW) | Colour | Model Ref.     |
|-------------|-------------|--------|----------------|
| 625         | 8           | 830    | <b>134.002</b> |
| 625         | 8           | 840    | <b>134.003</b> |
| 825         | 10          | 830    | <b>134.005</b> |
| 825         | 10          | 840    | <b>134.006</b> |

## Options

Please select from the options below.

|  |             |
|--|-------------|
| SwitchDIM, DALI or DSI                     | <b>/ECO</b> |
| Narrow beam                                | <b>/NB</b>  |
| Single Point Connection to an ILEM product | <b>/SPC</b> |
| 3 hour EM conversion                       | <b>/EM</b>  |
| 3 hour DALI addressable EM conversion      | <b>/EMD</b> |

NOTE:

If no void access:  $\varnothing 65$  mm cut-out required for driver  
 $\varnothing 80$  mm cut-out required for ECO driver


# 134 Series Datasheet




## Options



**/NB**  
Narrow beam reflector



**/ECO**  
SwitchDIM, DALI or DSI




**ILEM**  
Please see ILEM datasheet



**/EM**  
EM conversion




**/EMD**  
3 hour DALI addressable and self test  
EM conversion



**/SPC**  
Single Point Connection to ILEM  
product - available separately

## Also Available



**2700K**  
Available on Ra90 module