

# 140 Series Datasheet

TRIDONIC  
TECHNOLOGY  
INSIDE


COMPLETE LIGHTING  
SERVICES LIMITED  
**CLS**



## Key Features


- ▶ LED illuminated 600 x 600 Modular
- ▶ Twin IP44 linear LED windows
- ▶ Excellent uniform light distribution
- ▶ Low glare variants
- ▶ Excellent efficacy to aid Part L compliance
- ▶ High output variants
- ▶ Life greater than 60,000 hours
- ▶ Dimming and emergency options
- ▶ Short circuit, overload and temperature protection

## Technical Drawing

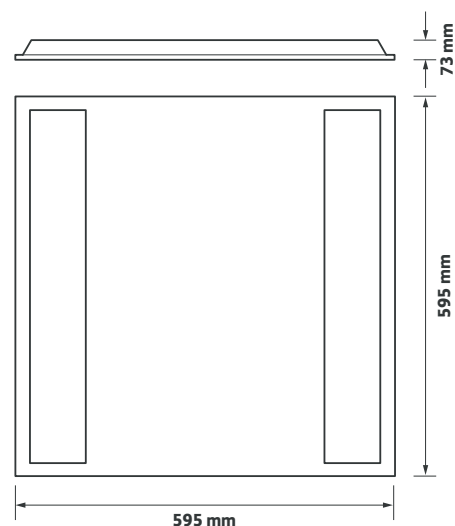

## Ordering Information

Output lm	Power tcW	Colour	Model Ref.
2600	20	830	<b>140.001</b>
2725	20	840	<b>140.002</b>
3200	25	830	<b>140.003</b>
3350	25	840	<b>140.004</b>
3725	30	830	<b>140.005</b>
3900	30	840	<b>140.006</b>
4300	35	830	<b>140.007</b>
4500	35	840	<b>140.008</b>
4925	40	830	<b>140.009</b>
5150	40	840	<b>140.010</b>




## Options

Please select from the options below.


SwitchDIM, DALI or DSI	<b>/ECO</b>
EM conversion	<b>/EM</b>
Self-test EM conversion	<b>/EMS</b>
DALI EM conversion	<b>/EMD</b>
Integral indicator for EM conversion	<b>I</b>
Single Point Connection to an ILEM product	<b>/SPC</b>
Contact sales for product variations	<b>Accessories</b>

# 140 Series Options and Accessories


## Options




**/ECO**  
SwitchDIM, DALI or DSI




**/EM**  
EM conversion



**/EMD**  
DALI EM conversion



**/EMI**  
Integral indicator for EM conversion



**/EMDI**  
Integral indicator for DALI EM conversion