



149 Series Datasheet



Key Features

- ▶ Compact fire rated IP65 LED downlight
 - ▶ Complete with white bezel
 - ▶ Multi-faceted reflector
 - ▶ Choice of colour temperatures
 - ▶ OSRAM Flex dip driver as standard
 - ▶ Brushed and black bezel options
 - ▶ Supplied with IP ceiling gasket
 - ▶ Accredited fire rating: FR30, FR60 and FR90*
- * Fire Rating in accordance with BS 476:Part 21: 1987, load bearing timber floor with softwood timber joists.

Technical Drawing

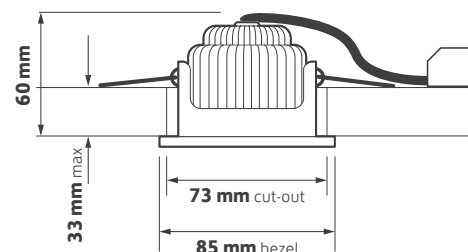

Ordering Information

Luminaire Output	Power	Colour	Model Ref.
Llm	tcW		
775	8	830	149.001
775	8	840	149.002

Options

Please select from the options below.

Brushed bezel	TA149/BA
Black bezel	TA149/BL
Phase-cut mains dimming	/MDIM
SwitchDIM, DALI or DSI	/ECO
3 hour emergency conversion	/EM
3 hour self-test and DALI emergency conversion	/EMD
Casambi wireless network (inc dim)	/BTC

149 Series Datasheet




Options




TA149/BA
Brushed bezel



TA149/BL
Black bezel



/MDIM
Phase-cut mains dimming




/ECO
SwitchDIM, DALI or DSI



/EM
3 hour emergency conversion*



/EMD
3 hour self-test and DALI emergency conversion*



/BTC
Casambi wireless network
(inc dim)

*Emergency remote indicators and ILEMs are not IP65 or fire rated