

FricelITE Range - LLE

THE FricelITE RANGE OF RECESSED LED LUMINAIRES ARE A COST-EFFECTIVE WAY OF PROVIDING STYLISH AND EFFICIENT COMMERCIAL LIGHTING. FEATURES INCLUDING MULTIPLE LINEAR LED BOARDS, AN OPALISED CENTRAL OPTIC AND GRADUATED ILLUMINATION ACROSS THE SIDE PANELS MAKE THE FricelITE A VERY ATTRACTIVE PROPOSITION. FricelITE MEET PART L2 ENERGY TARGETS WHILE TAKING ACCOUNT OF LG7 CRITERIA.

TECHNICAL DATA




Features

- Long life, energy efficient LEDs
- Low profile recessed body
- Simple universal recessed installation
- Linear microprism opalised central optic
- Graduated illumination across the side panels
- Even illumination without LED spotting


Options

- DALI and DSI dimming
- Three hour standard emergency
- Three hour Self-Test and DALI
- 600 x 600, 300 x 1200 (mm)
- Air handling

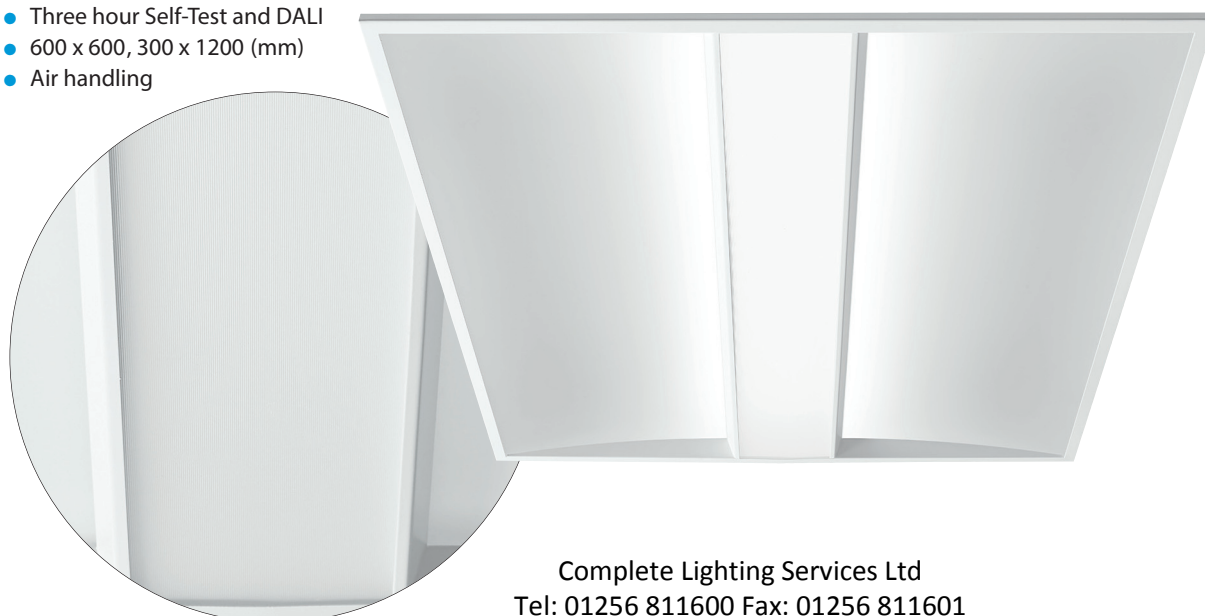

FriceLITE Range

PHOTOMETRIC DATA and MECHANICAL DETAIL

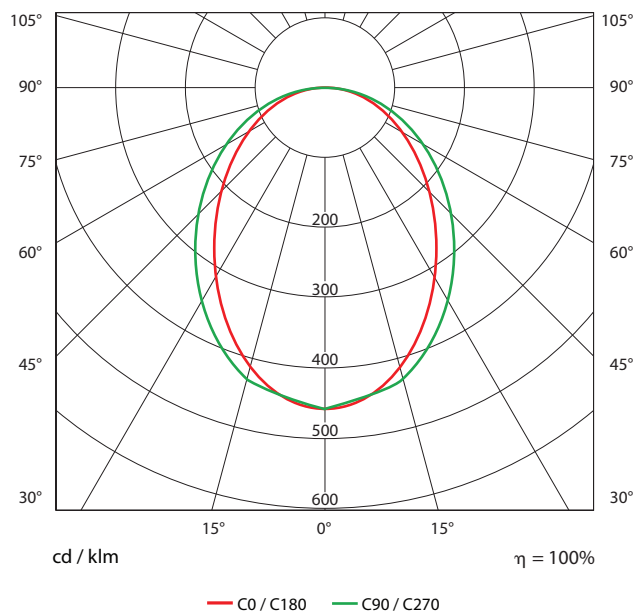

PHOTOMETRY


LED Lumen Output	up to 4300 Luminaire lumens
Colour Temperature	4000K as standard
RA	>80 as standard
Efficiency	106lm/W

Cat Ref:

Frice/lite/LLE/*/**

*4000K OR 3000K

**HF OR DALI/SWITCH DIM

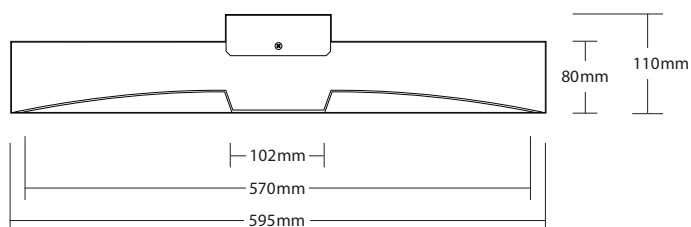

In accordance with its policy of continuous research and product development, the company reserves the right to amend or withdraw specifications without prior notice.

