

IceLITE Range-QLE

IceLITE ARE A RANGE OF RECESSED LED LUMINAIRES UTILISES THE LATEST LED TECHNOLOGY AND INTELLIGENT DESIGN FLAIR TO PRODUCE COST-EFFECTIVE COMMERCIAL LUMINAIRES WITH WIDE APPEAL. MEETING PART L2 ENERGY TARGETS (TAKING ACCOUNT OF LG7 CRITERIA), IceLITE FEATURES A CENTRALLY ILLUMINATED REEDED AND OPALISED OPTIC, THIS ENSURES EVEN ILLUMINATION WITHOUT LED SPOTTING.



Features

- Long life, energy efficient LEDs
- Low profile recessed body
- Simple universal recessed installation
- Centrally illuminated reeded and opalised optic
- Graduated illumination across the side panels
- Even illumination without LED spotting


Options

- DALI and DSI dimming
- Three hour standard emergency
- Three hour Self-Test and DALI
- 600 x 600, 300 x 1200 (mm)
- Air handling



IceLITE Range

PHOTOMETRIC DATA and MECHANICAL DETAIL

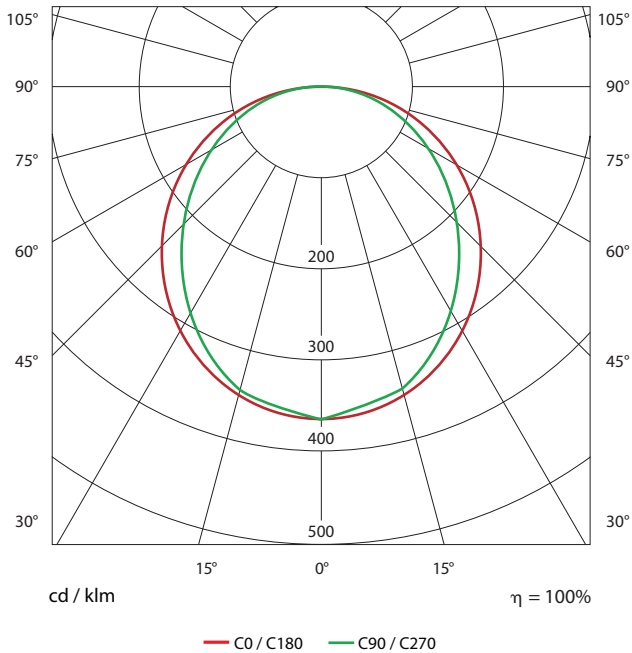


LED Lumen Output	up to 4800 Luminaire lumens
Colour Temperature	4000K as standard
RA	>80 as standard
Efficiency	109lm/W

Order Ref:

ICE/LITE/QLE/*/**

*4000K OR 3000K

** HF OR DALI/SWITCH DIM

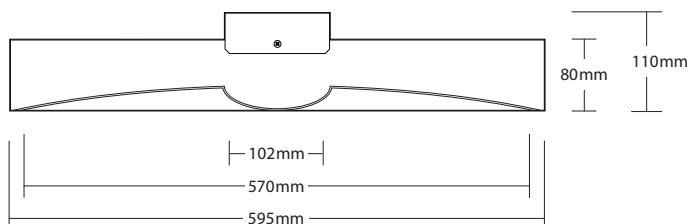

In accordance with its policy of continuous research and product development, the company reserves the right to amend or withdraw specifications without prior notice.