

122 Series Datasheet

PHILIPS
TECHNOLOGY
INSIDE

COMPLETE LIGHTING
SERVICES LIMITED
CLS



/BB




/WB



189 mm

Key Features

- ▶ Fully adjustable LED framelight
- ▶ Incorporates Philips Premium White module and driver system
- ▶ UGR19 and ETL compliant variants
- ▶ Multifaceted 40° reflector as standard. Alternative reflector and beam options
- ▶ Plaster-in option
- ▶ Emergency, DALI and dimming options
- ▶ 5 year warranty



Ordering Information

| Heads | Luminaire output (lm) | Power (tcW) | Colour | Model Ref. |
|-------|-----------------------|-------------|--------|----------------|
| 1x | 1800 | 18 | 930 | 122.001 |
| 1x | 1925 | 18 | 940 | 122.002 |
| 1x | 2425 | 27 | 930 | 122.003 |
| 1x | 2600 | 27 | 940 | 122.004 |
| 1x | 3250 | 32 | 930 | 122.005 |
| 1x | 3500 | 32 | 940 | 122.006 |
| 1x | 4600 | 48 | 930 | 122.007 |
| 1x | 4950 | 48 | 840 | 122.008 |


Output figures are per head

Finish Options

Please select from the options below. White = RAL9016, black = RAL9005

| | |
|---------------------------|------------|
| White bezel, white gimbal | /WW |
| Black bezel, black gimbal | /BB |
| White bezel, black gimbal | /WB |
| Black bezel, white gimbal | /BW |

Technical Drawing

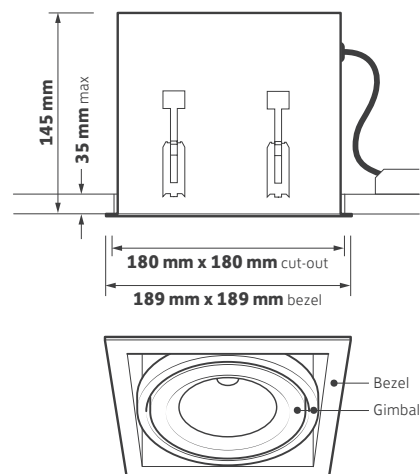

Options

Please select from the options below.

| | |
|--|----------------|
| 25° multi-faceted reflector | /MF25 |
| 60° multi-faceted reflector | /MF60 |
| 40° specular reflector | /SP40 |
| 50° satin reflector | /SA50 |
| Touch dimming / DALI | /T+DALI |
| Casambi Bluetooth wireless network (inc dim) | /BTC |
| Emergency (remote indicator) | /EM |
| DALI emergency (remote indicator) | /EMD |
| Emergency (integral indicator) | /EMI |
| DALI emergency (integral indicator) | /EMDI |
| Plaster-in | /PI |
| Mesh void guard | /VG |
| Black snoot | /SN |

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification. E&OE. **MDS-258D 24/08/2021**

122 Series Twin Datasheet


PHILIPS
TECHNOLOGY
INSIDE

COMPLETE LIGHTING
SERVICES LIMITED
CLS




Key Features

- Fully adjustable LED framelight
- Incorporates Philips Premium White module and driver system
- UGR19 and ETL compliant variants
- Multifaceted 40° reflector as standard. Alternative reflector and beam options
- Plaster-in option
- Emergency, DALI and dimming options
- 5 year warranty



Technical Drawing

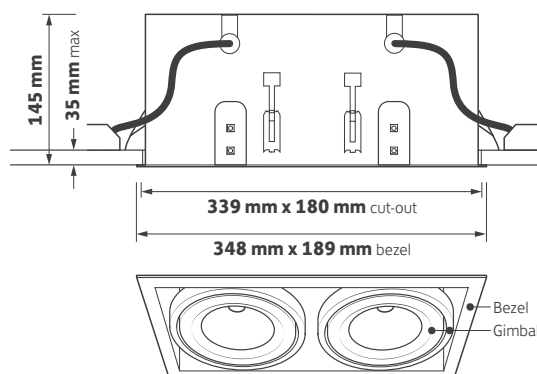

Ordering Information

| Heads | Luminaire output (lm) | Power (tcW) | Colour | Model Ref. |
|-------|-----------------------|-------------|--------|----------------|
| 2 x | 1800 | 18 | 930 | 122.201 |
| 2 x | 1925 | 18 | 940 | 122.202 |
| 2 x | 2425 | 27 | 930 | 122.203 |
| 2 x | 2600 | 27 | 940 | 122.204 |
| 2 x | 3250 | 32 | 930 | 122.205 |
| 2 x | 3500 | 32 | 940 | 122.206 |
| 2 x | 4600 | 48 | 930 | 122.207 |
| 2 x | 4950 | 48 | 840 | 122.208 |

Output figures are per head

Finish Options

Please select from the options below. White = RAL9016, black = RAL9005

| | |
|---------------------------|------------|
| White bezel, white gimbal | /WW |
| Black bezel, black gimbal | /BB |
| White bezel, black gimbal | /WB |
| Black bezel, white gimbal | /BW |

Options

Please select from the options below.


| | |
|--|----------------|
| 25° multi-faceted reflector | /MF25 |
| 60° multi-faceted reflector | /MF60 |
| 40° specular reflector | /SP40 |
| 50° satin reflector | /SA50 |
| Touch dimming / DALI | /T+DALI |
| Casambi Bluetooth wireless network (inc dim) | /BTC |
| Emergency (remote indicator) | /EM |
| DALI emergency (remote indicator) | /EMD |
| Emergency (integral indicator) | /EMI |
| DALI emergency (integral indicator) | /EMDI |
| Plaster-in | /PI |
| Mesh void guard | /VG |
| Black snoot | /SN |

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification. E&OE. **MDS-258D 24/08/2021**

122 Series Triple Datasheet


PHILIPS
TECHNOLOGY
INSIDE

COMPLETE LIGHTING
SERVICES LIMITED
CLS

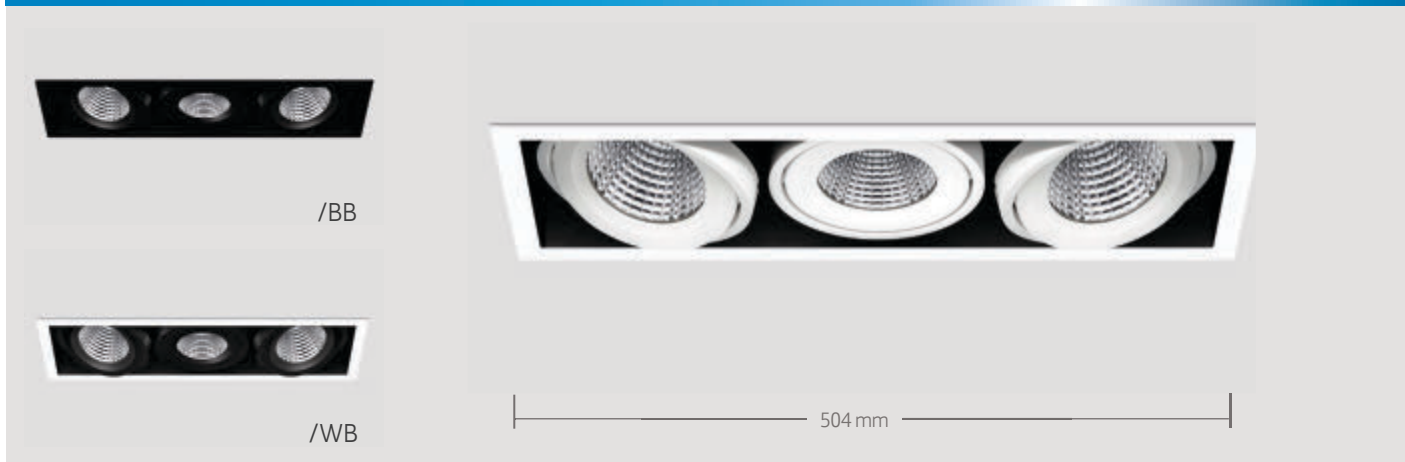

Key Features

- Fully adjustable LED framelight
- Incorporates Philips Premium White module and driver system
- UGR19 and ETL compliant variants
- Multifaceted 40° reflector as standard. Alternative reflector and beam options
- Plaster-in option
- Emergency, DALI and dimming options
- 5 year warranty



Ordering Information

| Heads | Luminaire output (lm) | Power (tcW) | Colour | Model Ref. |
|-------|-----------------------|-------------|--------|----------------|
| 3 x | 1800 | 18 | 930 | 122.301 |
| 3 x | 1925 | 18 | 940 | 122.302 |
| 3 x | 2425 | 27 | 930 | 122.303 |
| 3 x | 2600 | 27 | 940 | 122.304 |
| 3 x | 3250 | 32 | 930 | 122.305 |
| 3 x | 3500 | 32 | 940 | 122.306 |
| 3 x | 4600 | 48 | 930 | 122.307 |
| 3 x | 4950 | 48 | 840 | 122.308 |


Output figures are per head

Finish Options

Please select from the options below. White = RAL9016, black = RAL9005

| | |
|---------------------------|------------|
| White bezel, white gimbal | /WW |
| Black bezel, black gimbal | /BB |
| White bezel, black gimbal | /WB |
| Black bezel, white gimbal | /BW |

Technical Drawing

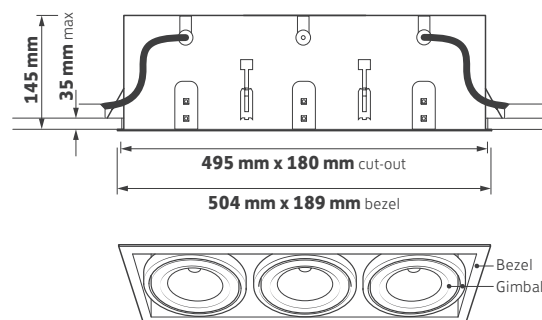

Options

Please select from the options below.

| | |
|--|----------------|
| 25° multi-faceted reflector | /MF25 |
| 60° multi-faceted reflector | /MF60 |
| 40° specular reflector | /SP40 |
| 50° satin reflector | /SA50 |
| Touch dimming / DALI | /T+DALI |
| Casambi Bluetooth wireless network (inc dim) | /BTC |
| Emergency (remote indicator) | /EM |
| DALI emergency (remote indicator) | /EMD |
| Emergency (integral indicator) | /EMI |
| DALI emergency (integral indicator) | /EMDI |
| Plaster-in | /PI |
| Mesh void guard | /VG |
| Black snoot | /SN |

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification. E&OE. **MDS-258D 24/08/2021**

122 Series Options

Options



/MF25
25° multi-faceted



/MF60
60° multi-faceted



/SP40
40° Specular



/SA50
50° Satin



/T+DALI
Touch dimming / DALI



/EM
EM conversion (remote indicator)



/EMD
DALI & self-test EM conversion (remote indicator)



/EMI
EM conversion (integral indicator)



/EMDI
DALI & self-test EM conversion (integral indicator)



/VG
Mesh void guard



/SN
Black snoot



/BTC
Casambi Bluetooth wireless network (inc dim)



/9
Ra90 High colour rendering



Product variations
Other colours and specifications available on request



/PI
Plaster-in



/WW
White bezel, white gimbal

NB: White - RAL9016 Black - RAL9005



/BB
Black bezel, black gimbal



/WB
White bezel, black gimbal



/BW
Black bezel, white gimbal