


EDMUNDTON 350 LED

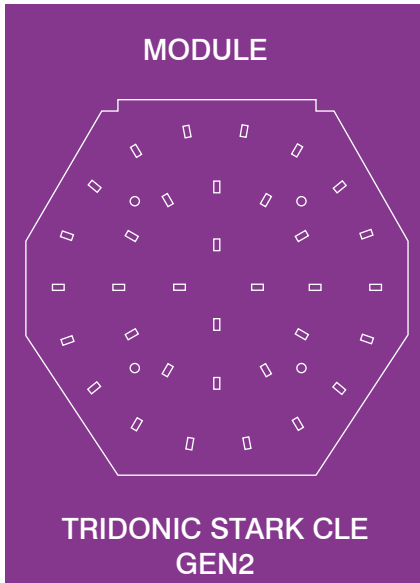

EDMUNDTON 350 LED

Internal circular spun LED luminaire with a high efficient satin opal polycarbonate diffuser

Catalogue References


- EDM LED 10/350/C84/1500
- EDM LED 10/350/M3/C84/1500
- EDM LED 14/350/C84/2000
- EDMLED 14/350/M3/C84/2000
- EDM 350 Semi recessing bezel

Product Specification & Features

- 1500 lumens at 9.2 watts (159lm/w at 25°C)
- 2000 lumens at 13.8 watts (144lm/w at 25°C)
- LED colour temperatures 3000K or 4000K
- Tridonic LED modules c/w 5 year warranty
- High colour rendering index CRI <80
- Emergency integrated separate LED option
- Long life time of 50,000 hours
- Integrated microwave sensor option
- Highly efficient opal diffuser

Note:
 Also available in mains and emergency HF fluorescent

Technical Drawing




Options suffix

DSI	Dimming
DALI	Dimming
SWITCH DIM	Dimming
CDF	Corridor Function
ST	Self Test Emergency
W	White Finish
CF	Chrome Finish
A	Aluminium Finish
BL	Backlite Version
MWS	Microwave Sensor

SURFACE

EDMUNDTON 450 LED

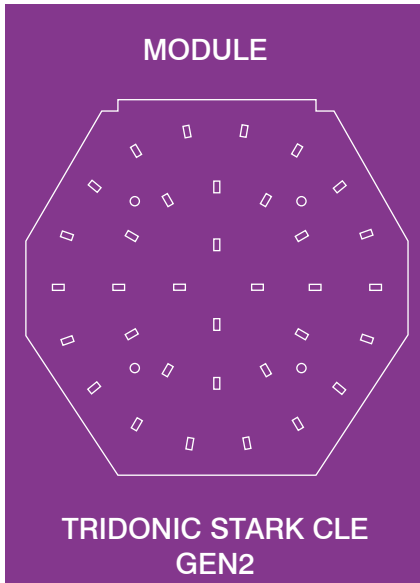

EDMUNDTON 450 LED

Internal circular spun LED luminaire with a high efficient satin opal polycarbonate diffuser

Catalogue References


EDM LED 19/450/C84/3000
 EDM LED 19/450/M3/C84/3000
 EDM LED 28/450/C84/4000
 EDM LED 28/450/M3/C84/4000
 EDM 450 Semi recessing bezel

Product Specification & Features

3000 lumens at 18.3 watts (158lm/w at 25°C)
 4000 lumens at 29.2 watts (143lm/w at 25°C)
 LED colour temperatures 3000k or 4000k
 Tridonic LED modules c/w 5 year warranty
 High colour rendering index CRI <80
 Emergency integrated separate LED option
 Long life time 50,000 hours
 Integrated microwave sensor option
 Highly efficient opal diffuser

Note:
 Also available in mains and emergency HF fluorescent

Technical Drawing



Options suffix

DSI	Dimming
DALI	Dimming
SWITCH DIM	Dimming
CDF	Corridor Function
ST	Self Test Emergency
W	White Finish
CF	Chrome Finish
A	Aluminium Finish
BL	Backlite Version
MWS	Microwave Sensor

SURFACE