


KINGSTON LED

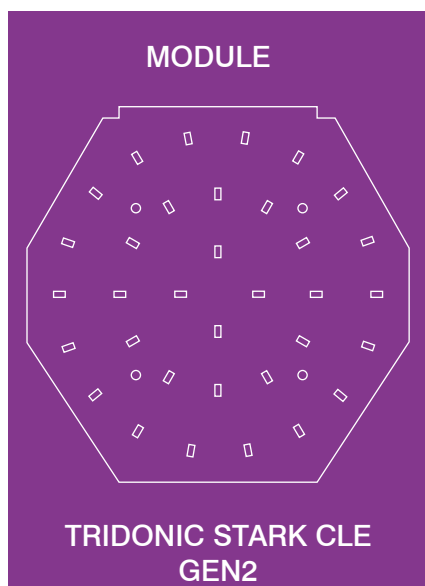

KINGSTON LED

Square IP65 surface mounted exterior die cast luminaire with a streamlined opal polycarbonate vandal resistant diffuser


Catalogue References

KIN LED 10/350/C84/1500
KIN LED 10/350/M3/C84/1500
KIN LED 14/350/C84/2000
KIN LED 14/350/C84/M3/2000
KIN LED 22/350/C84/3000
KIN LED 22/350/M3/C84/3000

Product Specification & Features

1500 lumens at 9.2 watts (159lm/w at 25°C)
2000 lumens at 13.8 watts (144lm/w at 25°C)
3000 lumens at 23.1 watts (134lm/w at 25°C)
LED colour temperatures at 3000k or 4000k
High colour rendering index CRI < 80
Emergency integrated separate LED option
Long life time of 50,000 hours
Die cast aluminium housing

Technical Drawing

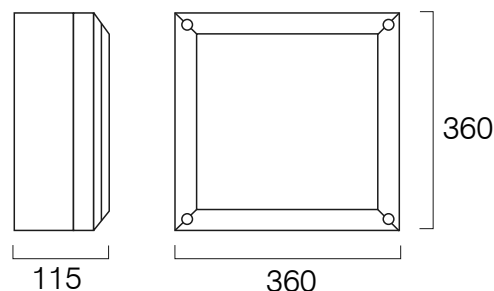

Options suffix

W	White Finish
B	Black Finish
A	Aluminium Finish