

HFLOOD20PIR

FEATURES IN BRIEF

1. Energy saving up to 70%
2. Even light distribution
3. Original Epistar chips
4. Instant start, no flicking, no humming.
5. Fit and Forget Solution
6. Low Lumen depreciation
7. 3 year warranty




CLS LED Floodlights are designed to replace the halogen types. This 20w version offers in excess of 1,500lm at 6000k. The quality design of the floodlight offers a stable light output that give even light distribution at 120 degrees. This unit has up to 40,000 hrs of useable light with no maintenance costs, this product is truly a fit and forget solution.

PART NUMBER	COLOUR	LUMINOUS FLUX
HFLOOD20PIR/6000K	6000K	1575lm
HFLOOD20PIR/4000k	4000K	1460lm
HFLOOD20PIR/3000k	3000K	1365 lm

20w PIR FLOODLIGHT FEATURES

20w PIR FLOODLIGHT RANGE			
ITEM	HFLOOD20PIR/6000k	HFLOOD20PIR/4000k	HFLOOD20PIR/3000k
Total Power Consumption	20W	20W	20w
Colour	Daylight	Cool White	Warm White
Colour Temperature	6000k	4000k	3000k
Life Time	>40,000 Hour	>40,000 Hour	>40,000 Hour
Operating Temperature	-40°C to +45°C	-40°C to + 45°C	-40°C to + 45°C
Dimensions	180 x 140 x 97mm	180 x 140 x 97mm	180 x 140 x 97mm
Lumen	1575lm	1460lm	1365lm
Certificates	CE, RoHS, WEEE	CE, RoHS, WEEE	CE, RoHS, WEEE
Beam Angle	120°	120°	120°
Power Factor	>95	>95	>95
CRI	>70	>70	>70

LUX LEVEL METER

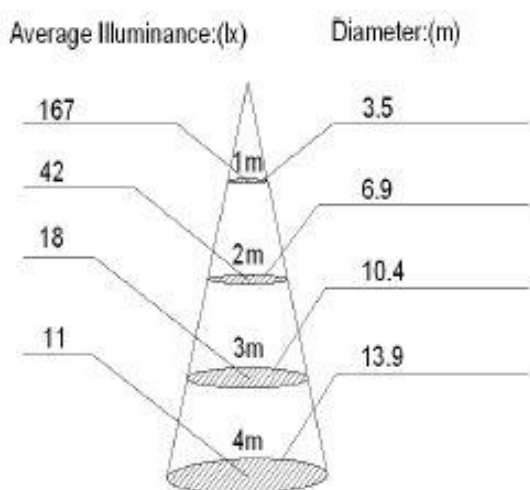

PRODUCT DIMENSIONS

