

EasyLED Medium Vandal Resistant Fixture IP65



VN30EQ

Housing:

Die cast aluminum housing, 20mm coin plugs with O-rings for conduit and photocell on two sides and back, black powdercoat finish over a chromate conversion coating.

Lens:

Clear polycarbonate prismatic lens.

Mounting:

Mount directly over a 100mm recessed outlet box, or use 20mm surface conduit.

LumaFit LED:

Array Lumens: 3,270
 Delivered Lumens: 2,724
 CRI: 84
 CCT: 5000K
 Rated Life: 50,000 Hours
 5-Year Warranty
 Aluminum Boards

Wattage:


Array: 22.7w, System: 27.5w

Driver:

Electronic Driver, 120-277V, 50/60Hz
 Dimmable Driver

Listing & Ratings:


CE: Listed for wet locations. IP65
 Operating Temperatures: -40°C to +40°C

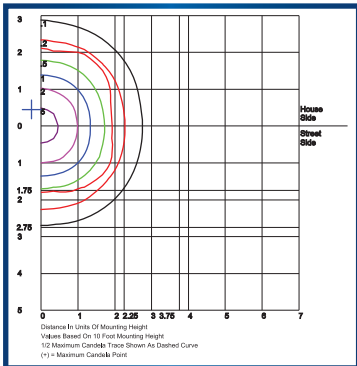

VN30EQF1X23U5KS

EasyLED Medium Vandal Resistant Fixture

Catalog #	Description	
Complete Units Ordering Information		
Example: VN30EQF1X23U5KSB		
VN30E	Model:	VN30E
Q	LED Mfr:	Q=QSSI
F	Optics:	F=115° Optics
1X	Number of Arrays:	1X=One
23	Wattage:	23=23w
U	Ballast:	U=120-277V
5K	CCT:	5K=5000K
S	Lens:	S=Clear Polycarbonate Prismatic Lens
B	Color:	B=Black

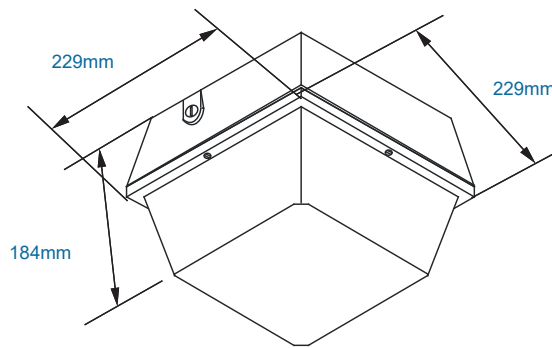

VN30EQ

Complete Lighting Services Ltd

Tel: 01256 811600 Fax: 01256 811601

email: sales@completelighting.co.uk

web: www.completelighting.co.uk