

# EasyLED Large Canopy IP65



VN40EQ

### Housing:

Die cast aluminum housing, 20mm coin plugs with O-rings for conduit & photocell on two sides & back, black powdercoat finish over a chromate conversion coating.

### Lens:

Clear polycarbonate prismatic lens.

### Mounting:

Mount directly over a 100mm recessed outlet box, or use 20mm surface conduit.

### LumaFit LED:

Array Lumens: 6,340  
 Delivered Lumens: 5,138  
 CRI: 85  
 CCT: 5000K  
 Rated Life: 50,000 Hours  
 5-Year Warranty  
 Aluminum Boards

### Wattage:

Array: 45.4w, System: 52.6w

### Driver:


Electronic Driver, 120-277V, 50/60Hz  
 Dimmable Driver

### Listing & Ratings:


CE: Listed for wet locations. IP65  
 Operating Temperatures: -40°C to +40°C

## EasyLED Large Canopy

| Catalog #   | Description       |                                      |
|---|-------------------|--------------------------------------|
| Complete Units<br>Ordering Information<br>Example: VN40EQF1X45U5KSB |                   |                                      |
| <b>VN40E</b>  | Model:            | VN40E                                |
| <b>Q</b>  | LED Mfr:          | Q=QSSI                               |
| <b>F</b>  | Optics:           | F=115° Optics                        |
| <b>1X</b>   | Number of Arrays: | 1X=One                               |
| <b>45</b>   | Wattage:          | 45=45w                               |
| <b>U</b>  | Ballast:          | U=120-277V                           |
| <b>5K</b>   | CCT:              | 5K=5000K                             |
| <b>S</b>  | Lens:             | S=Clear Polycarbonate Prismatic Lens |
| <b>B</b>  | Color:            | B=Black                              |

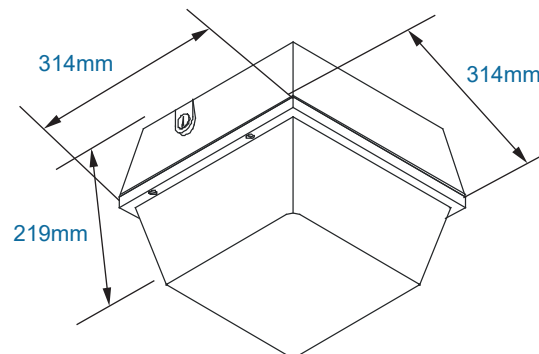

VN40EQ

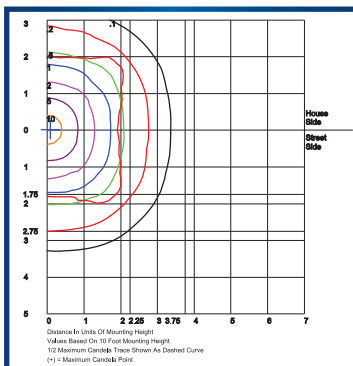

VN40EQF1X45U5KSB

Complete Lighting Services Ltd  
 Tel: 01256 811600 Fax: 01256 811601  
 email: [sales@completelighting.co.uk](mailto:sales@completelighting.co.uk)  
 web: [www.completelighting.co.uk](http://www.completelighting.co.uk)