

EasyLED Vandal Resistant Garage Lighter IP65



VNGL40EQ

Housing:

Die cast aluminum housing, 20mm coin plugs with O-rings for conduit & photocell on sides & back, black architectural powdercoat finish over a chromate conversion coating. Integral gear mounting.

Lens:

Clear polycarbonate prismatic lens.

Mounting:

Built-in template for mounting to an electrical box, or use 20mm surface conduit.

LumaFit LED:

Array Lumens: 7,805
 Delivered Lumens: 6,338
 CRI: 80+
 CCT: 5000K
 Rated Life: 50,000 Hours
 5-Year Warranty
 Aluminum Boards

Wattage:

Array: 53.7w, System: 62.3w

Driver:


Electronic Driver, 120-277V, 50/60Hz
 Dimmable Driver

Listing & Ratings:


CE: Listed for wet locations. IP65
 Operating Temperatures: -40°C to +40°C

EasyLED Vandal Resistant Garage Lighter

Catalog #	Description	
Complete Units		
Ordering Information		
Example: VNGL40EQF1X54U5KSB		
VNGL40E	Model:	VNGL40E
Q	LED Mfr:	Q=QSSI
F	Optics:	F=115° Optics
1X	Number of Arrays:	1X=One
54	Wattage:	54=54w
U	Ballast:	U=120-277V
5K	CCT:	5K=5000K
S	Lens:	S=Clear Polycarbonate Prismatic Lens
B	Color:	B=Black

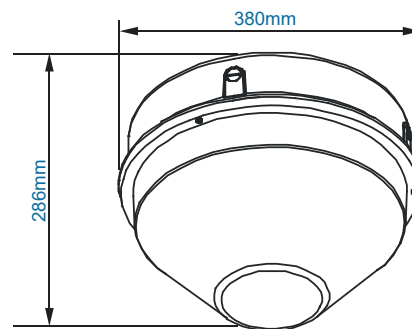

VNGL40EQ

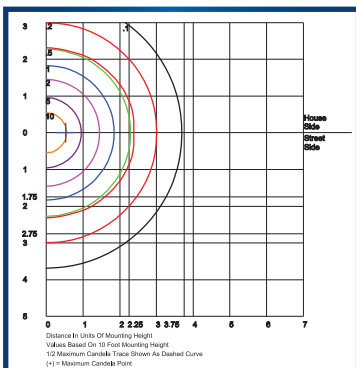

VNGL40EQF1X54U5KS

Complete Lighting Services Ltd
 Tel: 01256 811600 Fax: 01256 811601
 email: sales@completelighting.co.uk
 web: www.completelighting.co.uk