

# Wall Mount

## EasyLED Excel Round Bulkhead Grid Frame IP67



Complete Lighting Services Ltd  
 Tel: 01256 811600 Fax: 01256 811601  
 email: [sales@completelighting.co.uk](mailto:sales@completelighting.co.uk)  
 web: [www.completelighting.co.uk](http://www.completelighting.co.uk)



WPR25GREQ

### Housing:

Die cast aluminum housing & grid front frame, textured powdercoat finish over a chromate conversion coating, gasketed

### Lens:

LumaLens polycarbonate opal lens

### Mounting:

Surface Mount

### Distribution:

Type IV

### LumaFit LED:

Array Lumens: 2,539  
 Delivered Lumens: 1,468  
 CRI: 82  
 CCT: 4000K, 5000K  
 Rated Life: 50,000 Hours  
 5-Year Warranty  
 Aluminum Boards

### Wattage:

Array: 17w, System: 19.6w

### Driver:


Electronic Driver, 120-277V, 50/60Hz  
 Dimmable Driver

### Listing & Ratings:

CE: Listed for wet locations. IP67  
 Operating Temperatures: -40°C to +40°C

## EasyLED Excel Round Bulkhead Grid Frame

Catalog #	Description	
Complete Units		
Ordering Information		
Example: WPR25GREQF1X17U5KLBM		
<b>WPR25GRE</b>	Model:	WPR25GRE
<b>Q</b>	LED Mfr:	Q=QSSI
<b>F</b>	Optics:	F=115° Optics
<b>1X</b>	Number of Arrays:	1X=One
<b>17</b>	Wattage:	17=17w
<b>U</b>	Ballast:	U=120-277V
<b>5K</b>	CCT:	4K=4000K, 5K=5000K
<b>L</b>	Lens:	L=LumaLens Polycarbonate Opal Lens
<b>B</b>	Color:	B=Black
<b>M</b>	Options:	M=Microwave Sensor

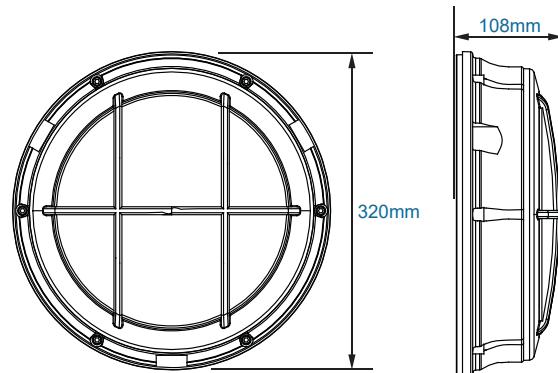

WPR25GREQ


# Wall Mount



Complete Lighting Services Ltd  
 Tel: 01256 811600 Fax: 01256 811601  
 email: [sales@completelighting.co.uk](mailto:sales@completelighting.co.uk)  
 web: [www.completelighting.co.uk](http://www.completelighting.co.uk)


## EasyLED Excel Round Bulkhead Grid Frame

Catalog #	Description
P17114	Microwave sensor



P17114

- **Voltage:** 220VAC/50Hz
- **Working Temperature:** -20°C ~ +60°C
- **Limited Temperature:** -35°C ~ +75°C
- **Microwave Frequency:** ISM 5.8GHz
- **Microwave Output Power:** <10mw
- **Sensing Distance:** 1m ~ 12m, adjustable
- **Sensing Time Delay:** 8 sec. ~ 30 min., adjustable
- **Angle Sensor:** 360°
- **Installation:** Indoor, wall or ceiling
- **Installation Height:** 2m ~ 3.5m, 2.5m suggested

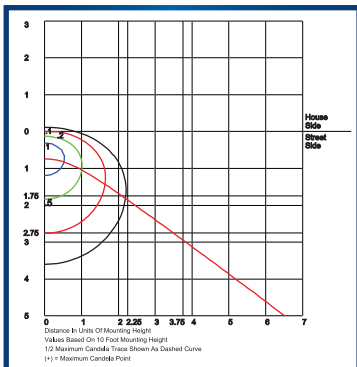

WPR25GREQF1X17U5K