


HDLPC15- PLUS

Features In Brief

1. Energy saving exceeding 60%
2. Uniformed light distribution.
3. Original Epistar chips
4. Instant start, no flicking, no hum
5. DALI/1-10V/DSI Versions availab
6. 3 year warranty

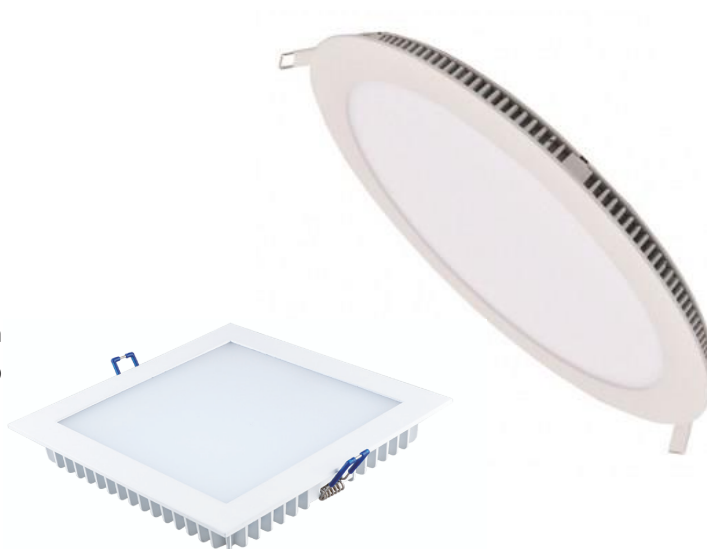


CLs LED downlights are designed to replace the traditional PL downlights commonly seen within offices and communal areas. The solid construction of this unit offers both uniformed light distribution as well as maintenance free operation. The downlight comes prewired with driver and has dimming options for 1-10v/DALI/DSI. Using original Epistar chips this unit is truly a fit and forget solution

PART NUMBER	COLOUR	LUMINOUS FLUX
HDLPC15-PLUS/CIRC or SQ	5000K	1365 lm
HDLPC15 -PLUS/CIRC or SQ	4000K	1305 lm
HDLPC15-PLUS/CIRC or SQ	3000K	1215 lm

DOWNLIGHT PRODUCT FEATURES

15W RANGE			
ITEM	HDLPC15P/5000k	HDLPC15P/4000k	HDLPC15P/3000k
Input Voltage	100~240V	100~240V	100~240v
Power Consumption	15 W	15 W	15 w
Colour	Daylight	Cool White	Warm White
Colour Temperature	5000k	4000k	3000k
Life Time	>50,000 Hour	>50,000 Hour	>50,000 Hour
Operating Temperature	-40°C to + 65°C	-40°C to + 65°C	-40°C to + 65°C
Storage Temperature	-30°C to + 60°C	-30°C to + 60°C	-30°C to + 60°C
Lumen	1365 lm	1305 lm	1215 lm
Certificates	CE, RoHS, FCC, WEEE	CE, RoHS, FCC, WEEE	CE, RoHS, FCC, WEEE
Beam Angle	110°	110°	110°
Outer Dimensions	SEE BELOW	SEE BELOW	SEE BELOW
Cut out Size	140mm	140mm	140mm
CRI	80	80	80
IP Rating	IP44	IP44	IP44

CHROMATICITY DIAGRAM

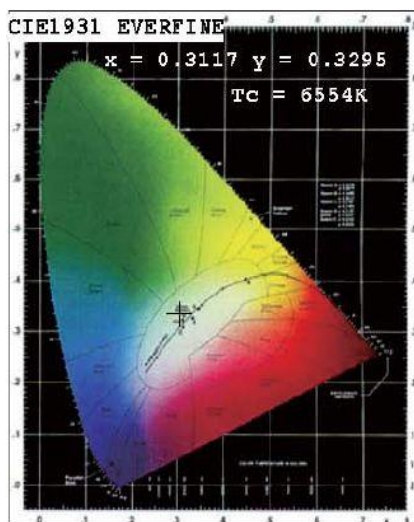


PRODUCT DIMENSIONS



Ø160mm • 15W



Hole size
 Ø 140mm

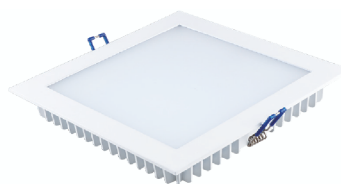

□160X160mm • 15W



Hole size
 140x140mm

Complete Lighting Services Limited

Rooksdown House, Southern Road, Basingstoke, Hants, RG21 3DZ

Tele: 01256 811600 Fax: 01256 811601 email: reception@completelighting.co.uk