


HDLPC8 - PLUS SQUARE

Features In Brief

1. Energy saving exceeding 60%
2. Uniformed light distribution.
3. Original Epistar chips
4. Instant start, no flicking, no humming.
5. DALI/1-10V/DSI Versions available
6. 3 year warranty

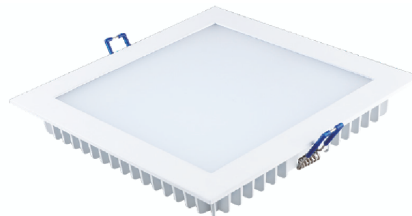


CLS LED downlights are designed to replace the traditional PL downlights commonly seen within offices and communal areas. The solid construction of this unit offers both uniformed light distribution as well as maintenance free operation. The downlight comes prewired with driver and has dimming options for 1-10v/DALI/DSI. Using original Epistar chips this unit is truly a fit and forget solution

PART NUMBER	COLOUR	LUMINOUS FLUX
HDLPC8-PLUS / SQ	5000K	664 lm
HDLPC8-PLUS / SQ	4000K	640 lm
HDLPC8-PLUS / SQ	3000K	600 lm

DOWNLIGHT PRODUCT FEATURES

8W RANGE			
ITEM	HDLPC8P/5000k	HDLPC8P/4000k	HDLPC8/3000k
Input Voltage	100~240V	100~240V	100~240v
Power Consumption	8 W	8W	8 w
Colour	Daylight	Cool White	Warm White
Colour Temperature	5000k	4000k	3000k
Life Time	>50,000 Hour	>50,000 Hour	>50,000 Hour
Operating Temperature	-40°C to + 65°C	-40°C to + 65°C	-40°C to + 65°C
Storage Temperature	-30°C to + 60°C	-30°C to + 60°C	-30°C to + 60°C
Lumen	688 lm (CIRC) 725l m(SQ)	646 lm (CIRC) 719 lm(SQ)	310lm
Certificates	CE, RoHS, FCC, WEEE	CE, RoHS, FCC,WEEE	CE, RoHS, FCC, WEEE
Beam Angle	110°	110°	110°
Outer Dimensions	SEE BELOW	SEE BELOW	SEE BELOW
Cut out Size	95mm	95mm	95mm
CRI	80	80	80
IP Rating	IP22	IP22	IP22

CHROMATICITY DIAGRAM

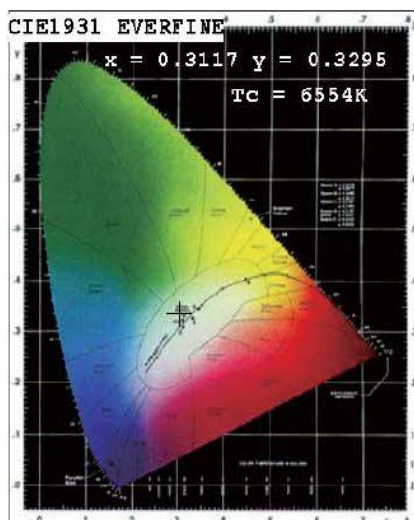

PRODUCT DIMENSIONS

