


RECESSED VERSION SIGNAL LED



Although the recessed *SignalLED* luminaires have similar appearance to conventional recessed exit signs these LED fittings are much smaller and make installations far more attractive. The housing has adjustable arms to simplify installation into different thickness supporting surfaces and the visible ceiling plate is available with a choice of finishes. As with the suspended *SignalLED* luminaires the recessed versions are supplied

with integral Maintained emergency lighting control gear powering 15 high brightness white LED's which clearly and evenly illuminate the safety sign legends. All *SignalLED* luminaires comply with the relevant requirements of EN60598.2.22

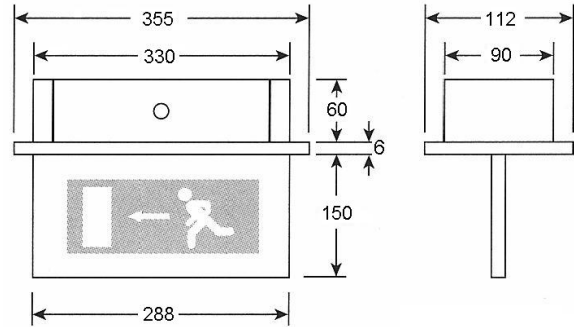

GENERAL SPECIFICATION & ORDER CODES

| | |
|-----------------|------------------------------------|
| Operation | Maintained |
| Light source | 15 Long life white LED's MacAdam 3 |
| Battery | 4.8V 1.1Ah NiCd |
| Charge current | 200mA nominal |
| Recharge period | 24hours (14hrs for 1hr duration) |
| Input voltage | 230Volt +/- 10% ~ 50Hz |
| Power | 12VA |
| IP Rating | IP20 |

RECESSED VERSIONS

| | |
|--------|---|
| RLD/M3 | Recessed LED exit sign, maintained, white painted ceiling plate |
|--------|---|

OPTIONS: /CH Chrome finish; /ST Self-test

