

'SignalLED' RANGE OF LED EXIT SIGNS

The *SignalLED* range of LED exit sign luminaires offers long life, low energy and flexible mounting solutions in a choice of attractive packages. The suspended luminaires feature extruded aluminium housings and a wide range of mounting attachments allowing wall, ceiling or suspended solutions. The recessed luminaires have conventional styling but with all the size and performance benefits provided from the latest LED technology. The luminaires feature a unique method of fitting legend 'screens' onto the face of the acrylic panel.

All *SignalLED* luminaires incorporate long life high brightness white LED's with typical life expectancy of over 50,000 hours. Self-test versions are also available




SURFACE VERSIONS



The suspended *SignalLED* luminaires are much smaller than conventional fluorescent hanging sign luminaires making installations more attractive but still providing 28metre viewing distance. All units are supplied with integral Maintained emergency lighting control gear powering 15 high brightness white LED's which clearly and evenly illuminate the safety sign legends. The range of mounting brackets allow fixing direct to the ceiling, wall fixing (parallel or perpendicular to the wall) or suspended solutions (surface, rod, wire or chain). In all cases the fixing brackets retain the standard luminaire body via quick release spring clips or two quarter turn latches.



PHOTOGRAPH SHOWING THE RELATIVE SIZE OF *SignalLED* AGAINST A CONVENTIONAL HANGING BLADE SIGN

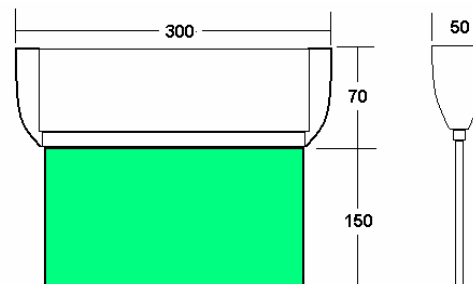

Complete Lighting Services Ltd
Tel: 01256 811600 Fax: 01256 811601
email: sales@completelighting.co.uk
web: www.completelighting.co.uk

GENERAL SPECIFICATION & ORDER CODES

Operation	Maintained
Light source	15 Long life white LED's
Battery	4.8V 1.1Ah NiCd
Charge current	200mA nominal
Recharge period	24hours (14hrs for 1hr duration)
Input voltage	230Volt +/- 10% ~ 50Hz
Power	12VA
IP Rating	IP20

NB: For SLD versions the standard body must be ordered with an appropriate mounting kit

ORDER CODE	DESCRIPTION
SUSPENDED VERSIONS	
SLD/M3	Suspended LED exit sign, maintained, silver aluminium body
SLD/CBRK	Ceiling mounting bracket
SLD/WBRK	Wall mounting bracket
SLD/EBRK	End fixing (flag) wall bracket
SLD/ROD***	Rod suspension kit *** = 250 or 500 (length of rods in mm)
SLD/WIRE	Wire suspension kit (adjustable to 1metre max.)
SLD/SBRK	Chain suspension kit (500mm of chain)
SLD Chain	Additional chain /metre
OPTIONS: /BR Brass finish; /WH White (painted) finish; /ST Self-test	